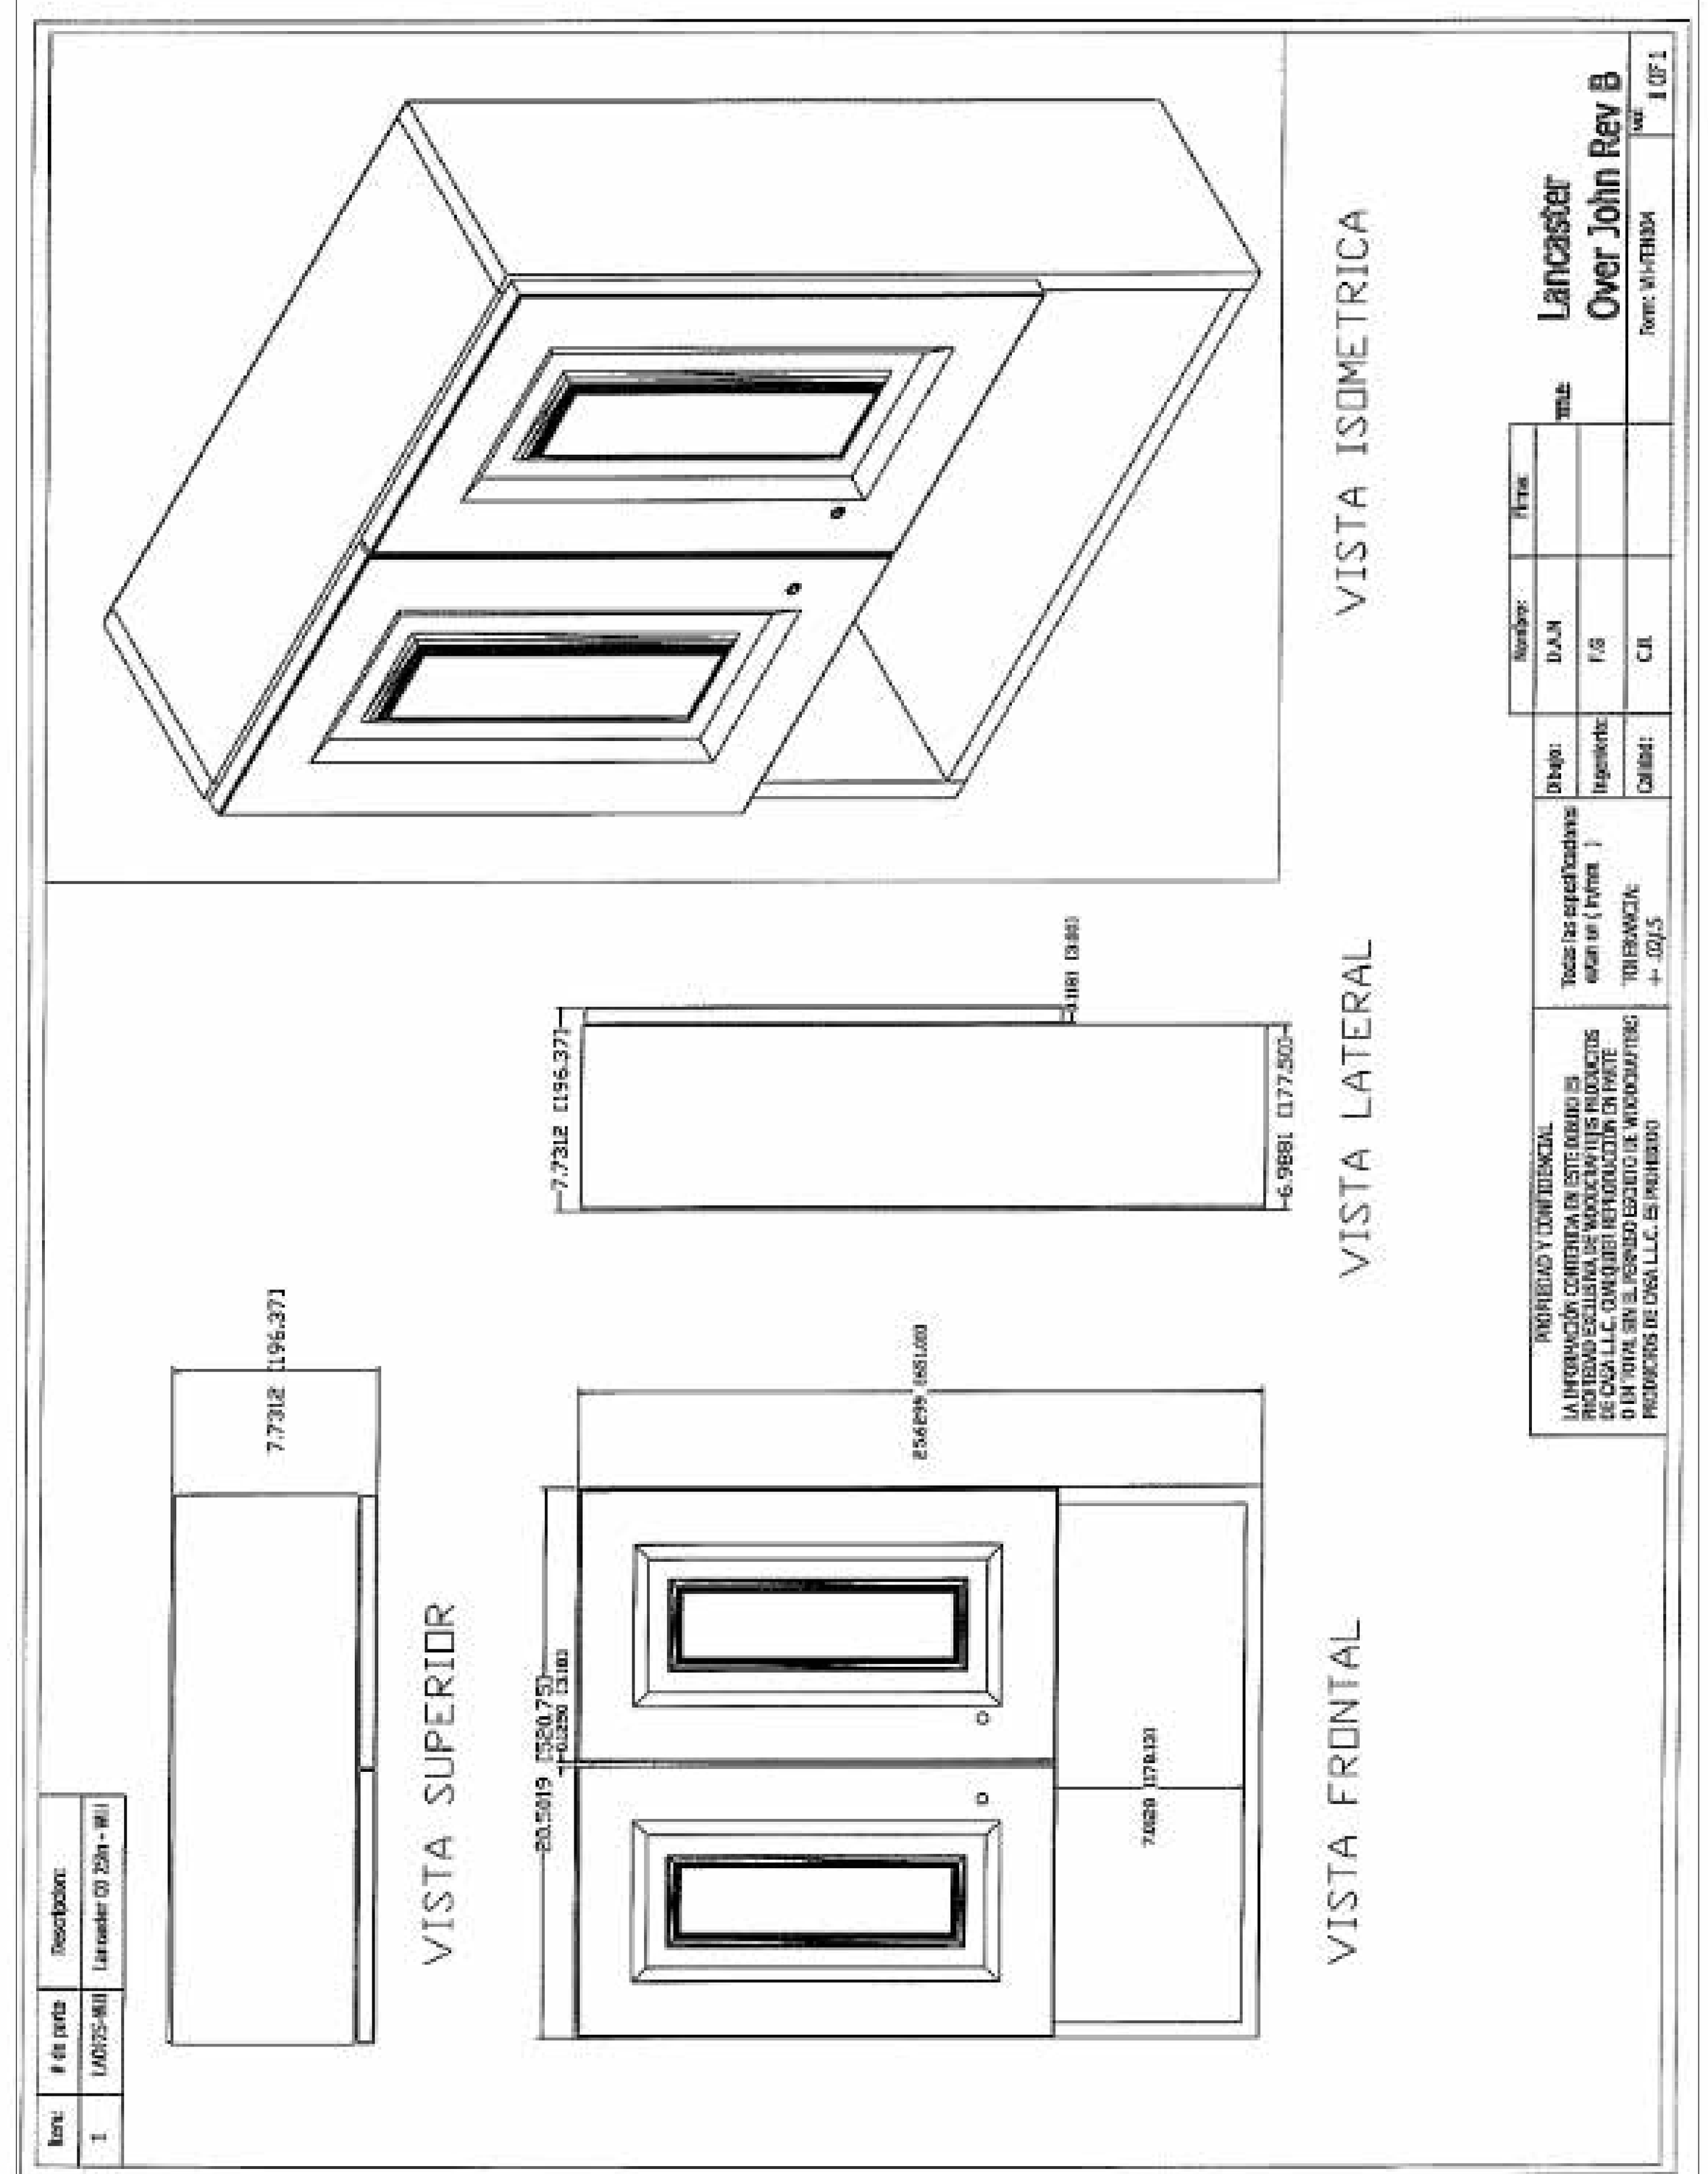

RA-7

AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №:	0362
ISSUED:	FEB 2007
REVISED:	26 NOV 2021

SURFACE MOUNTED STAINLESS STEEL AUTOMATIC LIQUID SOAP AND GEL HAND SANITIZER DISPENSER

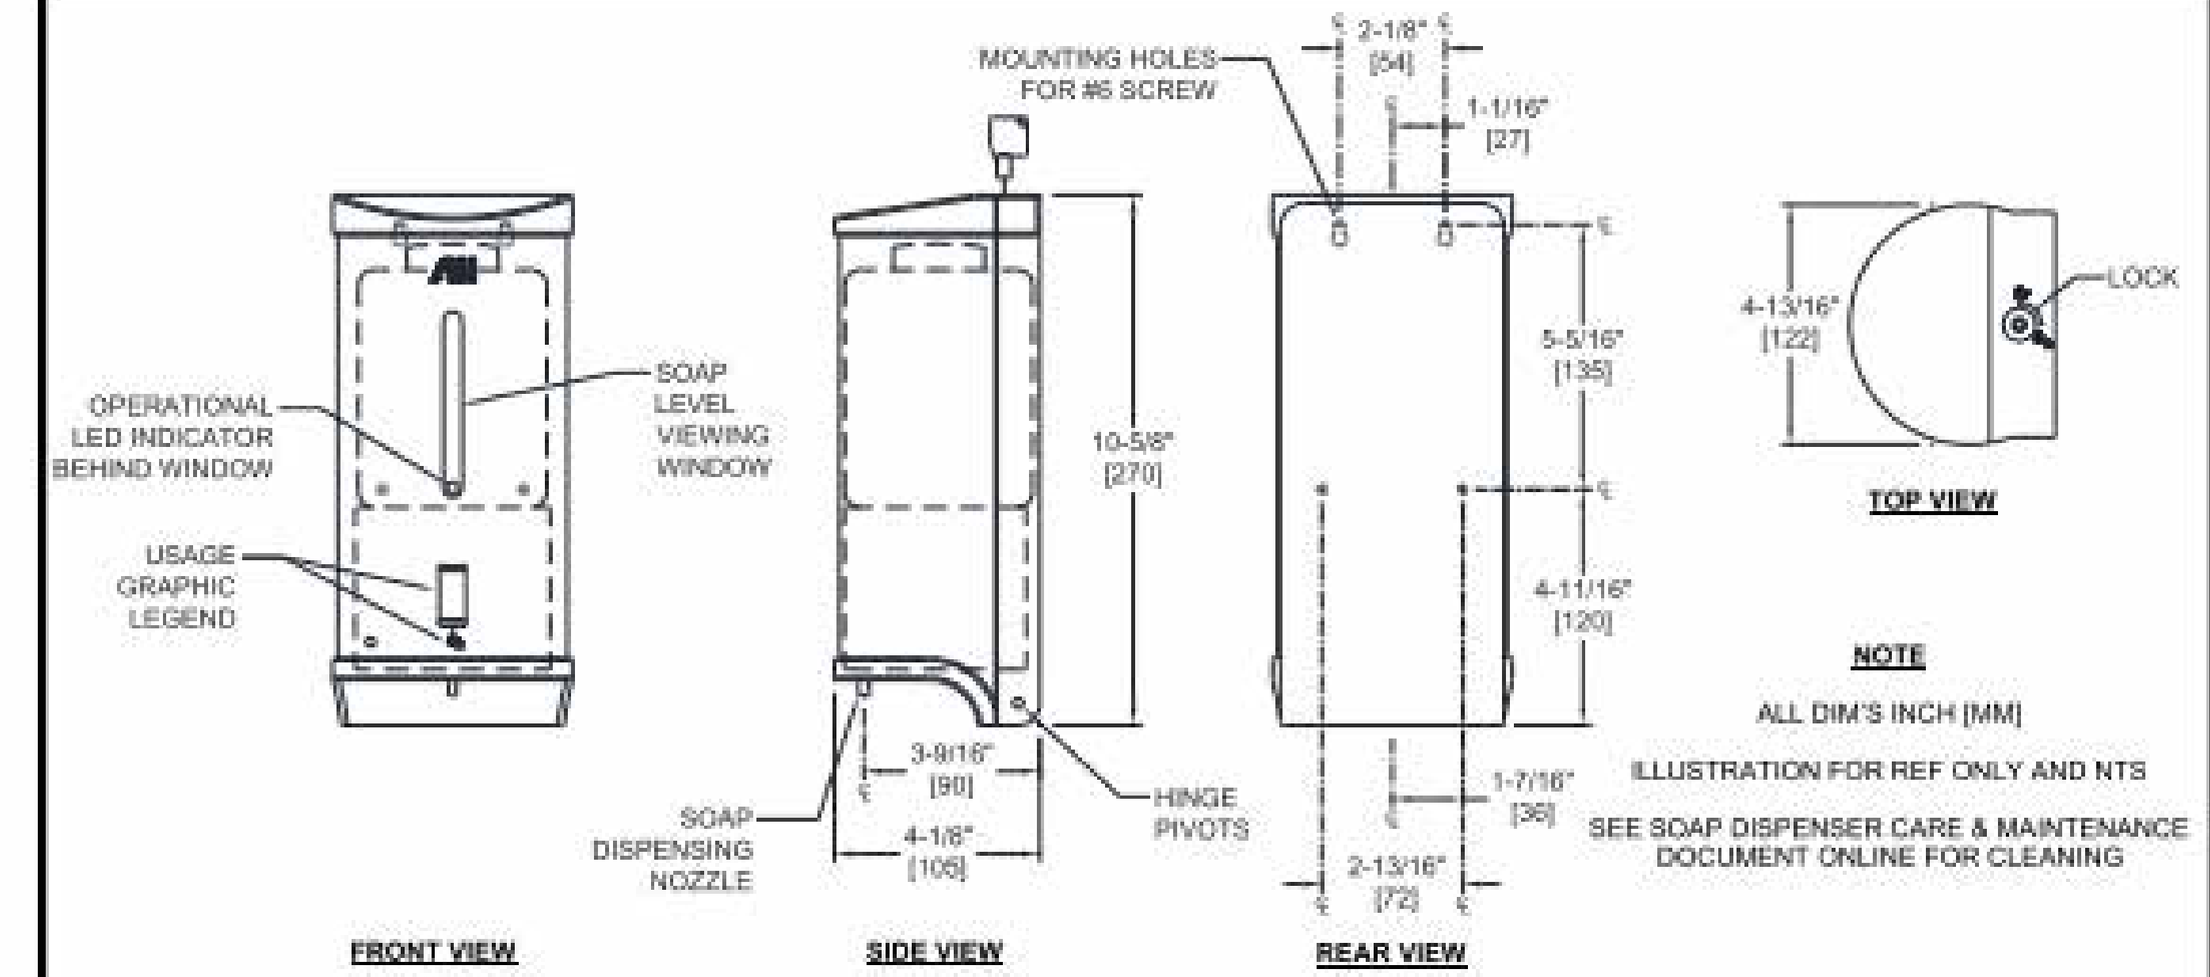

SPECIFICATION
Surface Mounted Stainless Steel Automatic Liquid Soap and Gel Hand Sanitizer Dispenser shall hold and dispense liquid soap or gel hand sanitizers having a pH in range 7 ± 1.5 and soaps or lotions only having viscosity in range 100-5k cP (mm²/s [mPa•s]) or gel sanitizers having viscosities in range 3.5k - 5k cP (mm²/s [mPa•s]) and a capacity of 27 oz [.8 L] using the refillable soap tank provided or disposable 27 oz [800 ml] bag-in-a-box format. Dispenser body shall be fabricated of alloy 18-8 stainless steel, type 304 with black high-impact ABS plastic top door, bottom plate and concealed gray high-impact ABS plastic back plate comprising a swing-open body secured with a top mounted lock which is opened with special barrel security key provided. All exposed stainless steel surfaces shall be either satin finish or matte black (add suffix -41). Dispenser shall be powered by four (4) AA-size (1.5 V) batteries (not supplied) and shall operate automatically from IR sensor that shall activate soap dispensing when hands are placed in sensor zone. Adjustable sensor detection range shall be preset at 2-3/8" [60] ± 1-1/2" [38]. An indicator LED shall provide status notification of battery condition and user sensor detection. Unit shall dispense a volume of .03 fl oz to .037 fl oz (1 ml to 1.1 ml) of soap or gel during each activation. A tamper resistant soap level-viewing window shall be provided. An Owner's Manual and Installation Guide (OM & IG) shall be provided with unit in carton.

Surface Mounted Stainless Steel Automatic Liquid Soap and Gel Hand Sanitizer Dispenser shall be Model № 0362 (add -41 for matte black) of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION
Surface mount unit to wall or partition with four (4) № 6 x 15/16" [M3.5 x 24] pan head self-threading pan head or flat head screws (supplied) into dry wall anchors (provided) through concealed mounting holes provided. Alternatively, unit may be installed on stand (Model № FS-0300) with hardware supplied with stand. Recommended installation height for general utility is 42" [1067] to 46" [1168] AFF to bottom of unit. For compliance with 2010 ADA Accessibility Standards install unit so that bottom of unit is no higher than 48" [1219] MAX AFF. Mount unit with bottom 7-7/8" [200] minimum above non-metallic washbasins or countertops and 11-13/16" [300] above stainless steel washbasins or countertops. OM & IG (№ 0610241228) and a MT (№ 0610160837) are provided with unit in carton.

OPERATION
Soap or gel sanitizer is automatically dispensed when hands are placed in sensor zone. Unit is reloaded by unlocking lock with special key (supplied), swinging open dispenser body and removing and refilling tank or replacing disposable internal container. Dispenser will continue to feed properly until empty. Supply is replenished manually on a cycle determined by maintenance needs. Batteries are replaced yearly or as required for heavy duty operation. See OM & IG for full details.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

RA-6

KB301 Baby Changing Station
Technical Data Sheet

Color

- KB301-00 Beige
- KB301-01 Grey
- KB301-05 White Granite

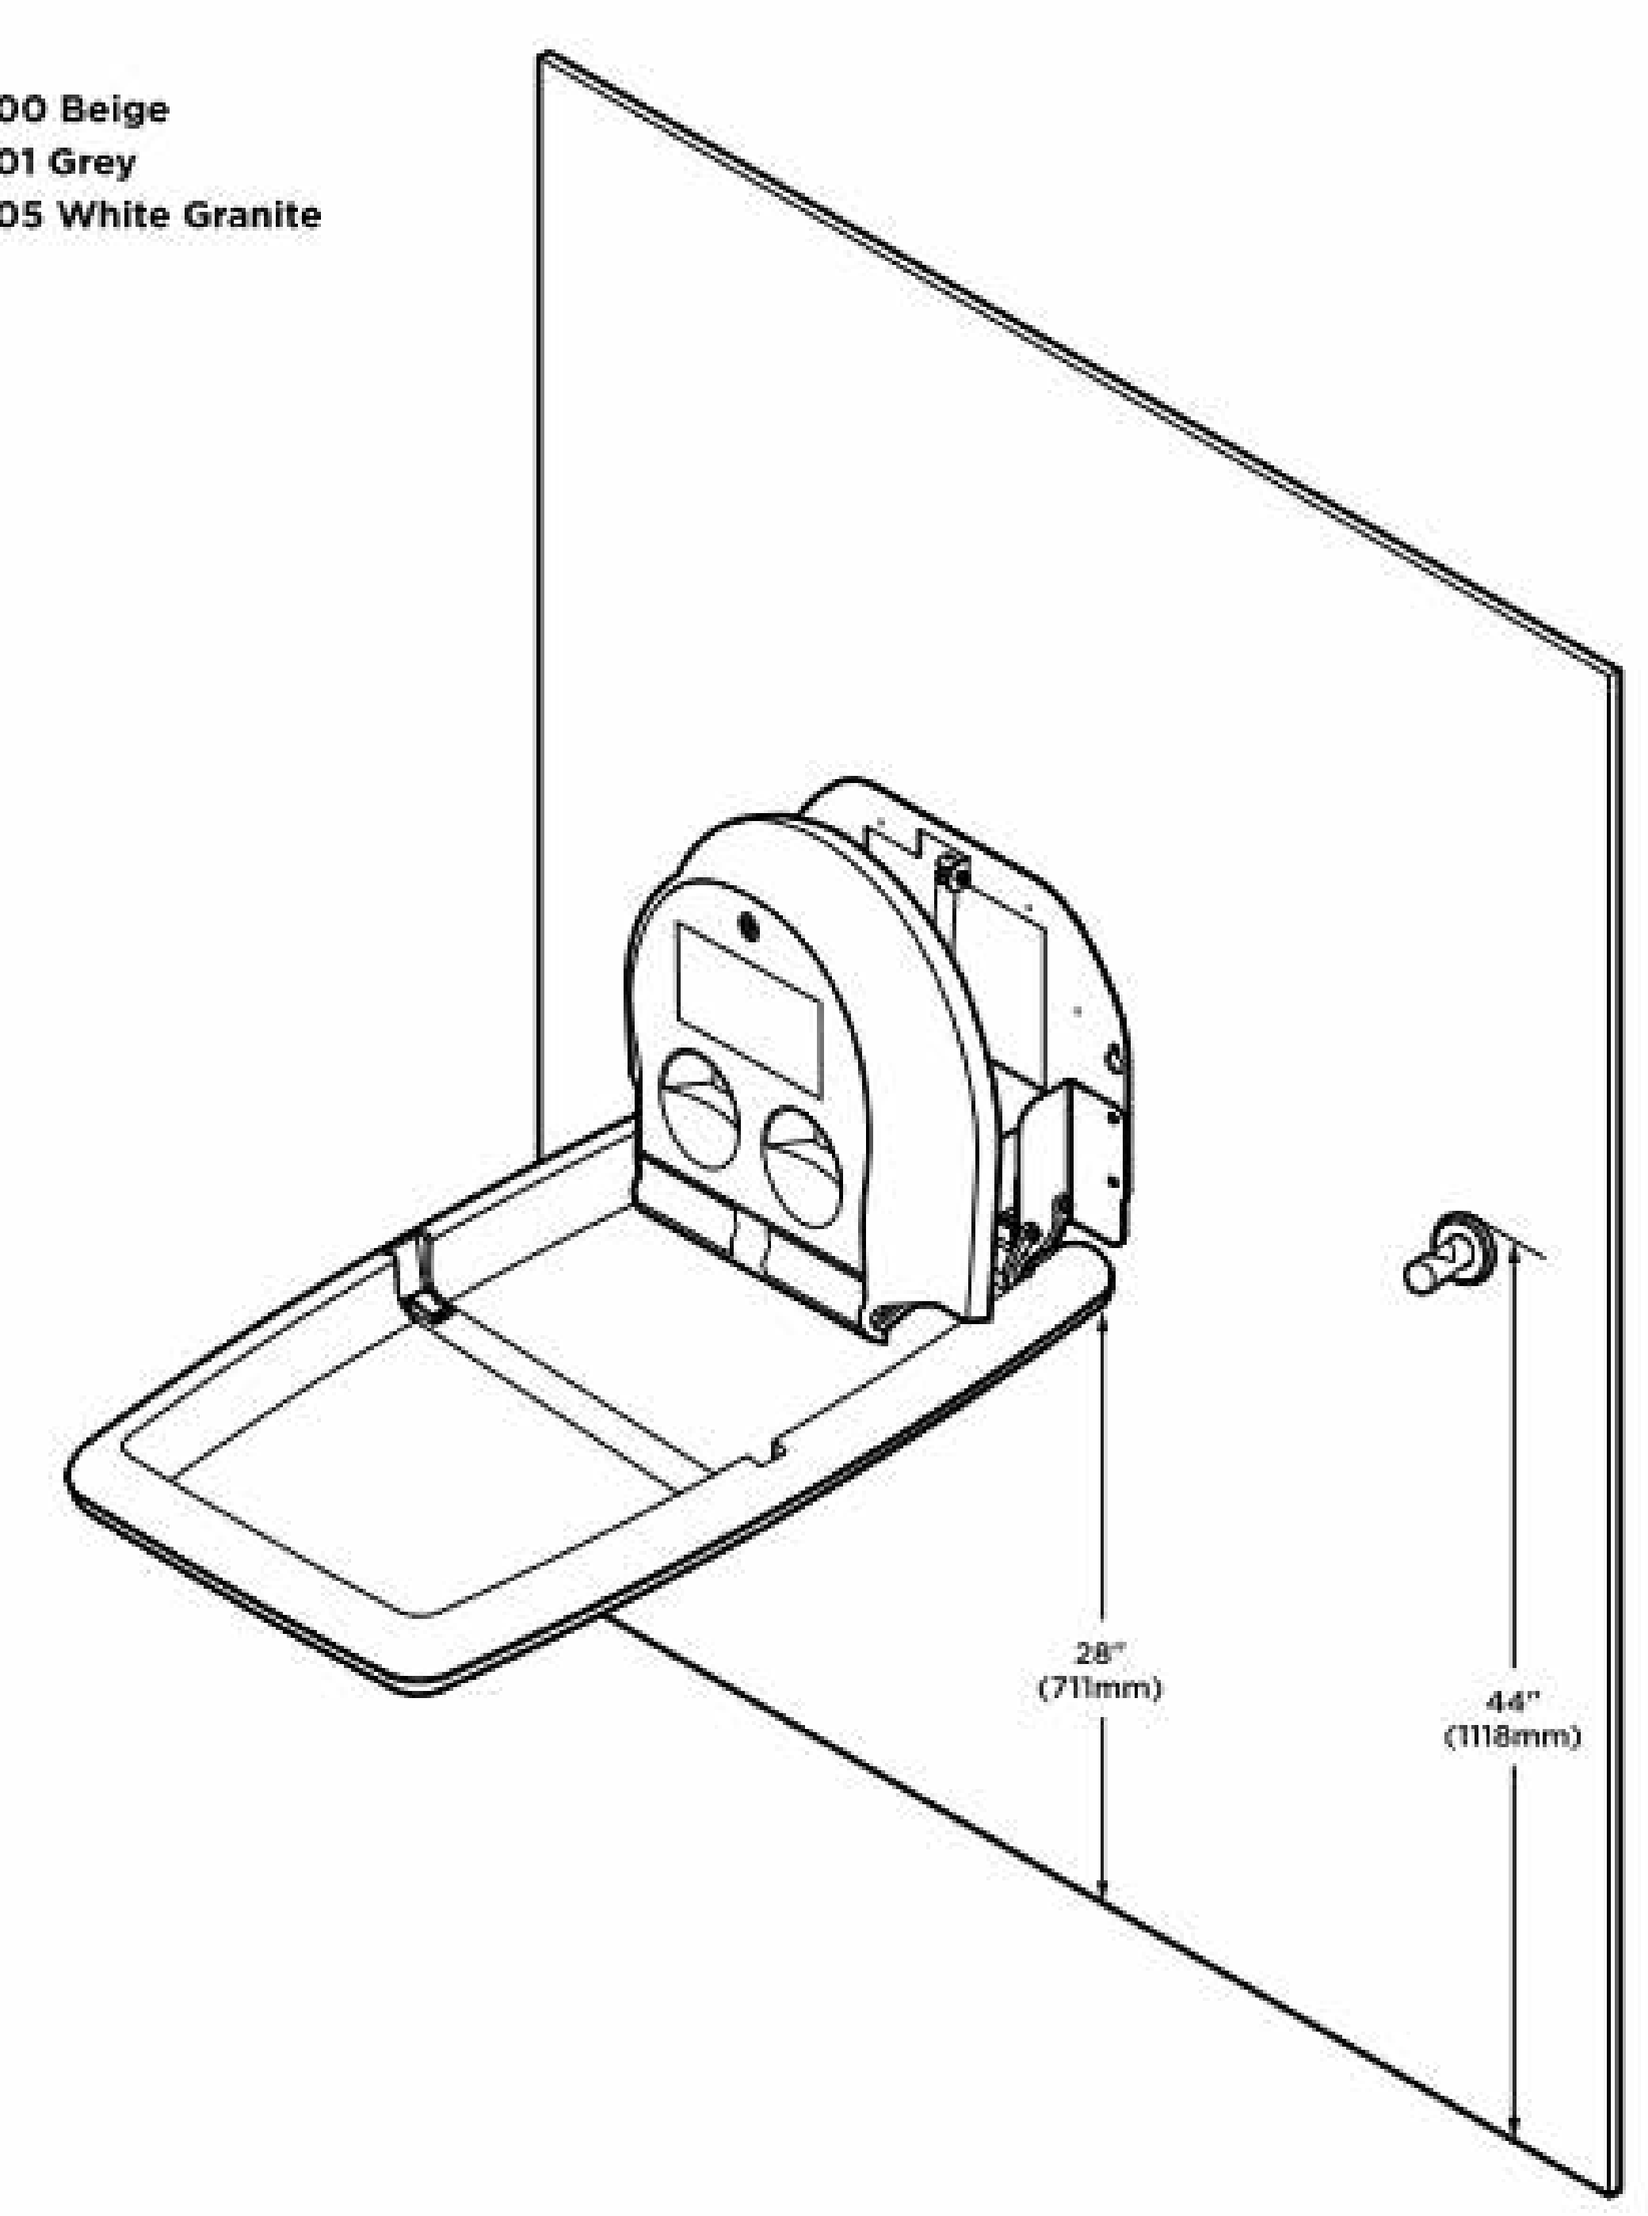

*Diagrams are not to scale.

RA-5

AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №:	GRABBAR CONFIG
ISSUED:	09/96
REVISED:	23 FEB 2015

GRAB BAR CONFIGURATIONS (PG 1 OF 3)

TYPE -01

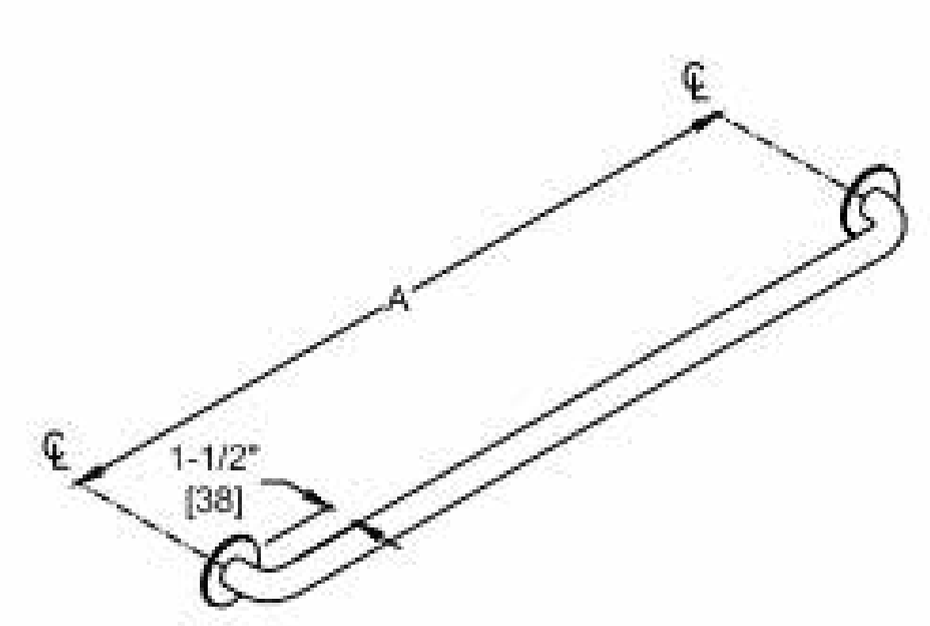

SCHEDULE

QTY.	DIM. A	QTY.	DIM. A
	12" [305]		36" [914]
	18" [457]		42" [1067]
	24" [610]		48" [1219]
	30" [762]		

TYPE -02

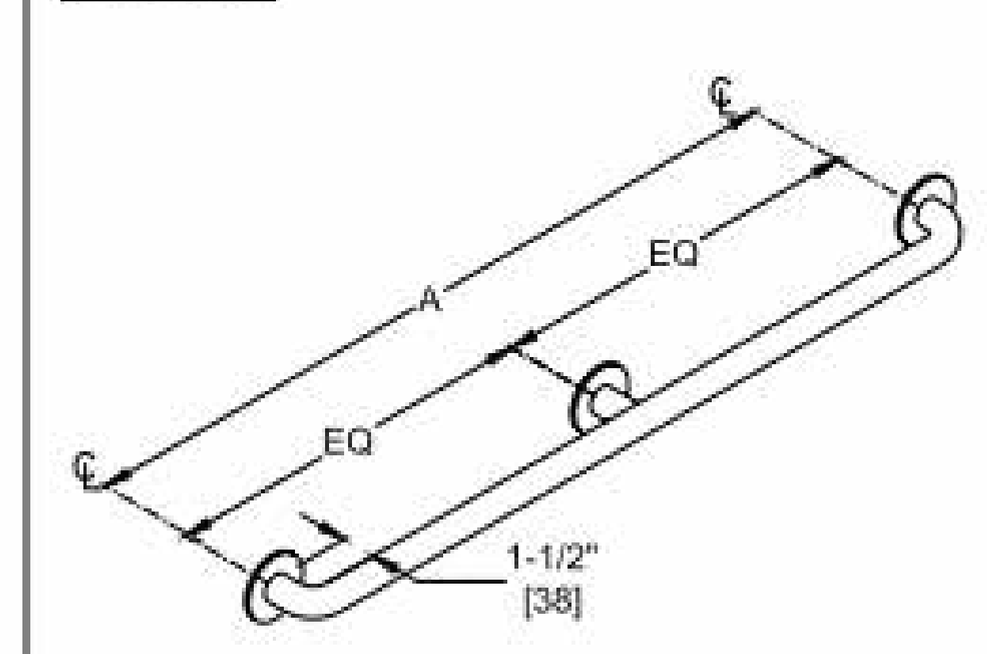

SCHEDULE

QTY.	DIM. A
	52" [1321]
	54" [1372]
	60" [1524]
	72" [1829]

TYPE -04

LH SHOWN
RH OPPOSITE

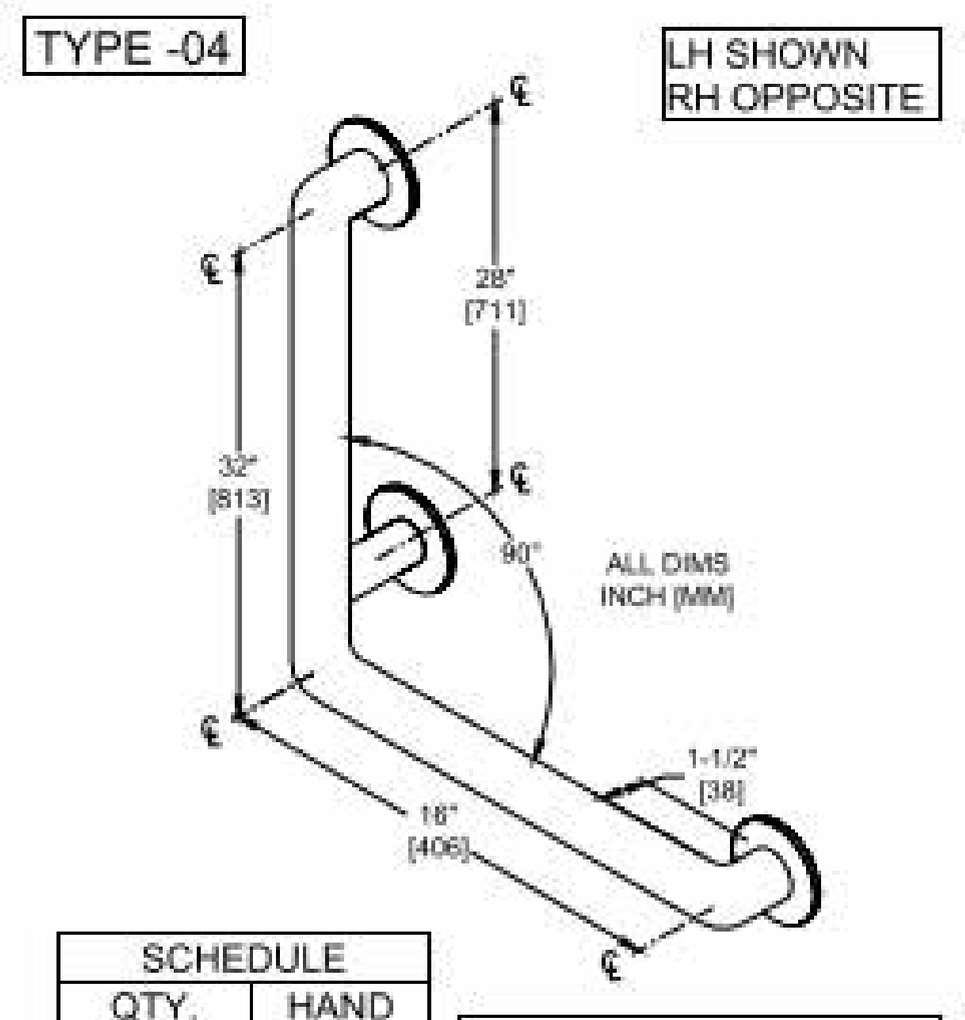

SCHEDULE

QTY.	HAND
	LH
	RH

MODEL № MUST SPECIFY -LH OR -RH

TYPE -15

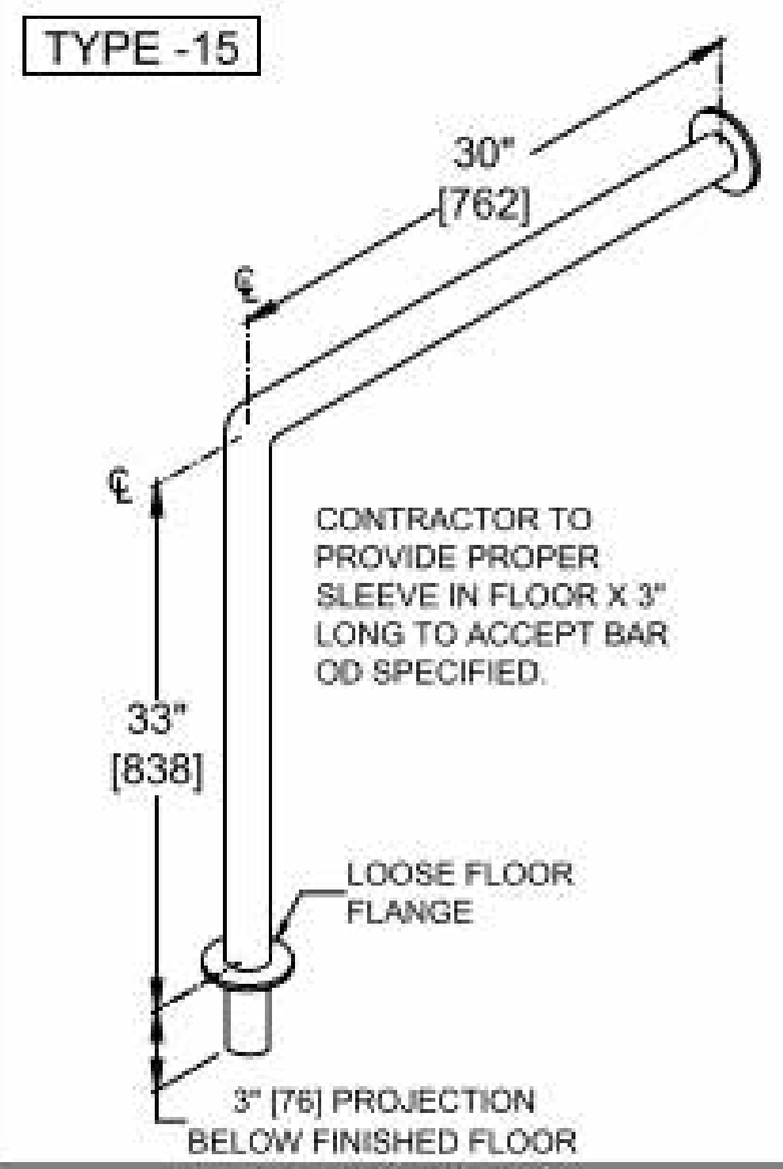

Accessory Specialties · AMERICAN DISPENSER · Desert Ray Products · WATROUS INC

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

RA-4

AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №:	0697-GAL
ISSUED:	01-87
REVISED:	18 JUL 2019

SURFACE MOUNTED SHELF AND DUAL TOILET PAPER HOLDER

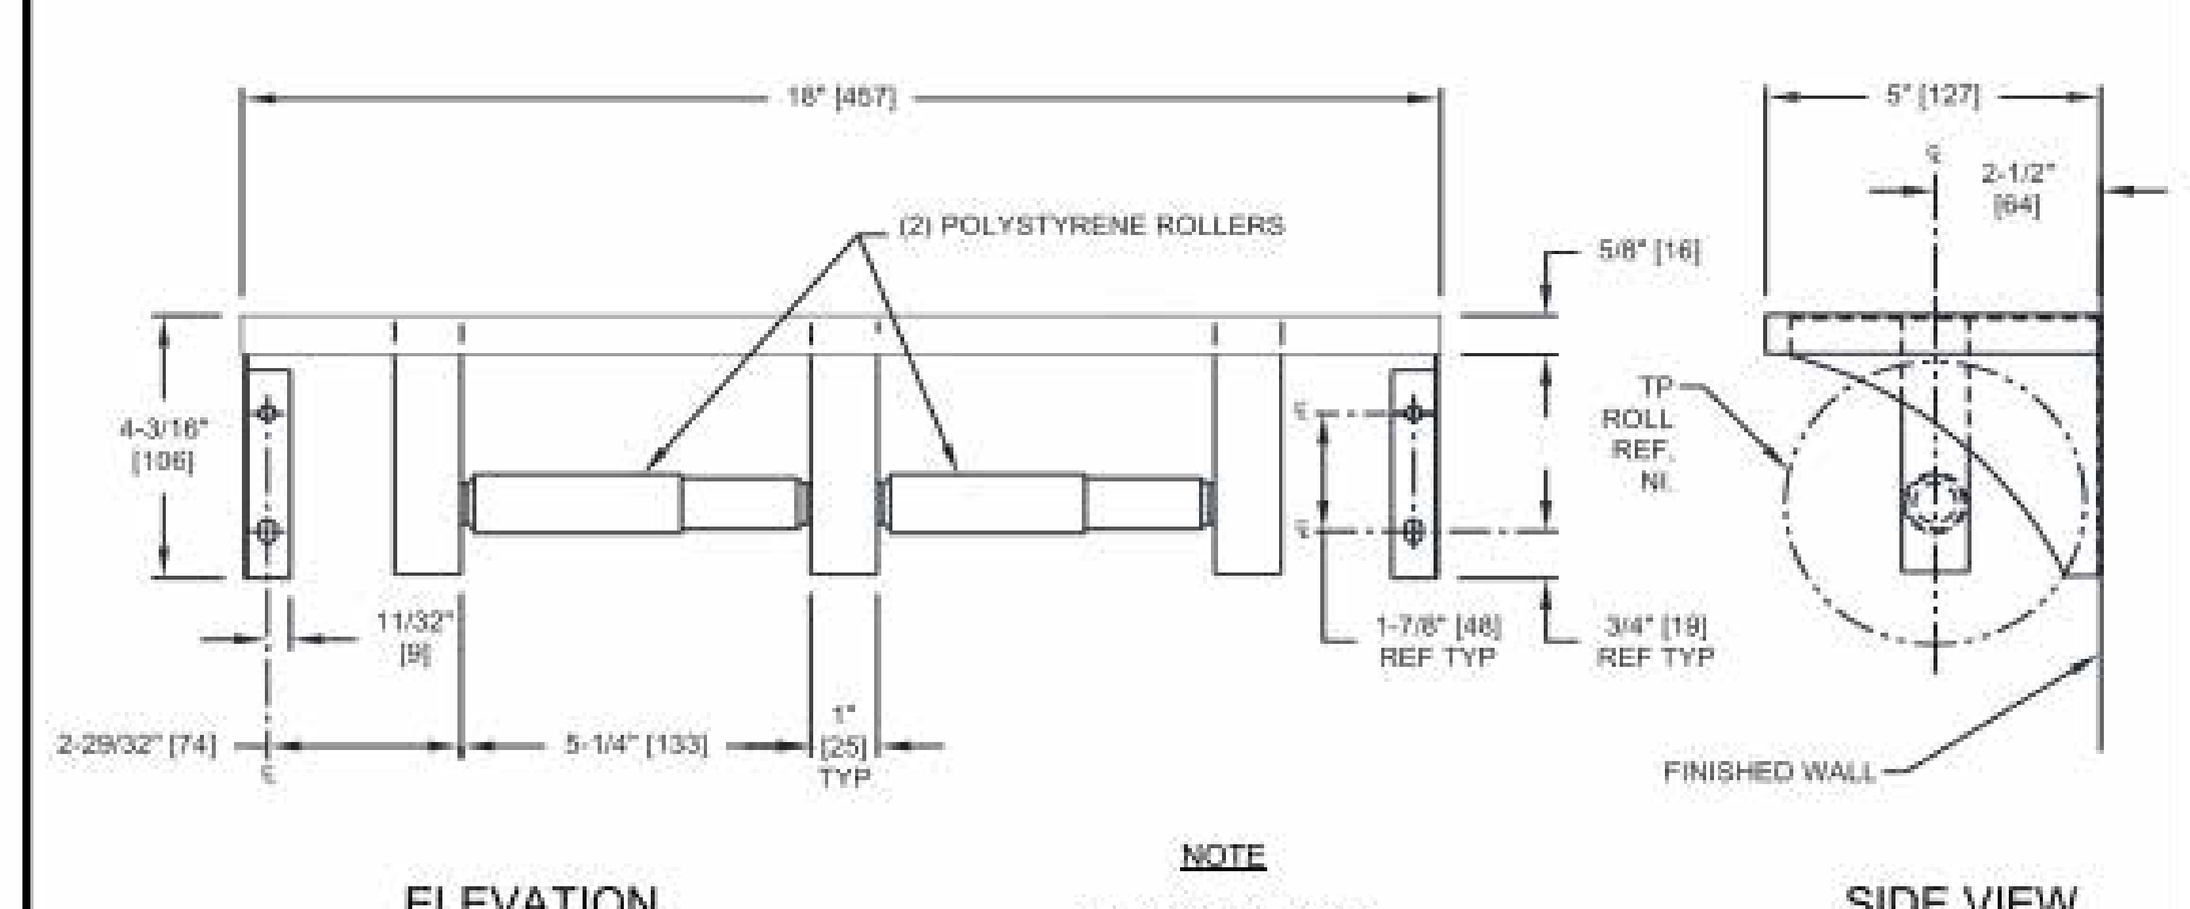

NOTE
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION
Surface Mounted Shelf & Dual Toilet Paper Holder shall hold two (2) 5" Dia [127] rolls of 1500 sheets or standard toilet paper rolls and shall have 5" [127] x 18" [457] shelf with 5/8" [16] hemmed lip on front edge. All metal parts shall be 18 gage [1,3] 304 stainless steel alloy 18-8. All exposed surfaces shall have satin finish and shall be protected during shipping by a PVC film easily removed after installation. Structural assembly of shelf and brackets/roll supports shall be of welded construction. Rollers (p/n R-003) shall be molded of high impact-resistant polystyrene plastic and two (2) shall be supplied.

Surface Mounted Shelf & Dual Toilet Paper Holder shall be Model № 0697-GAL as manufactured by American Specialties, 441 Saw Mill River Road, Inc., Yonkers, NY 10701-4913

INSTALLATION
Unit is surface mounted on wall or partition using №10 self-threading screws (by others) through holes provided in support brackets. For compliance with 2010 ADA accessibility Standards and 2015 ABA Standards, install unit so that centerline of nearest roll holder is 7" [178] min to 9" max [229] from front of toilet and axis of rolls is 15" [381] min AFF (Above Finished Floor) to 23" [584] max AFF. Recommended mounting height for general utility is 32" [813] to 36" [914] AFF.

OPERATION
Toilet paper rolls are self-feeding on user-pull demand until supply is depleted. Rollers are spring loaded for retention and provide free delivery.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

RA-2&3

AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №:	0185
ISSUED:	10-05
REVISED:	02 MAR 2020

SURFACE MOUNTED SENSOR HAND DRYER (Pg 1 of 2)

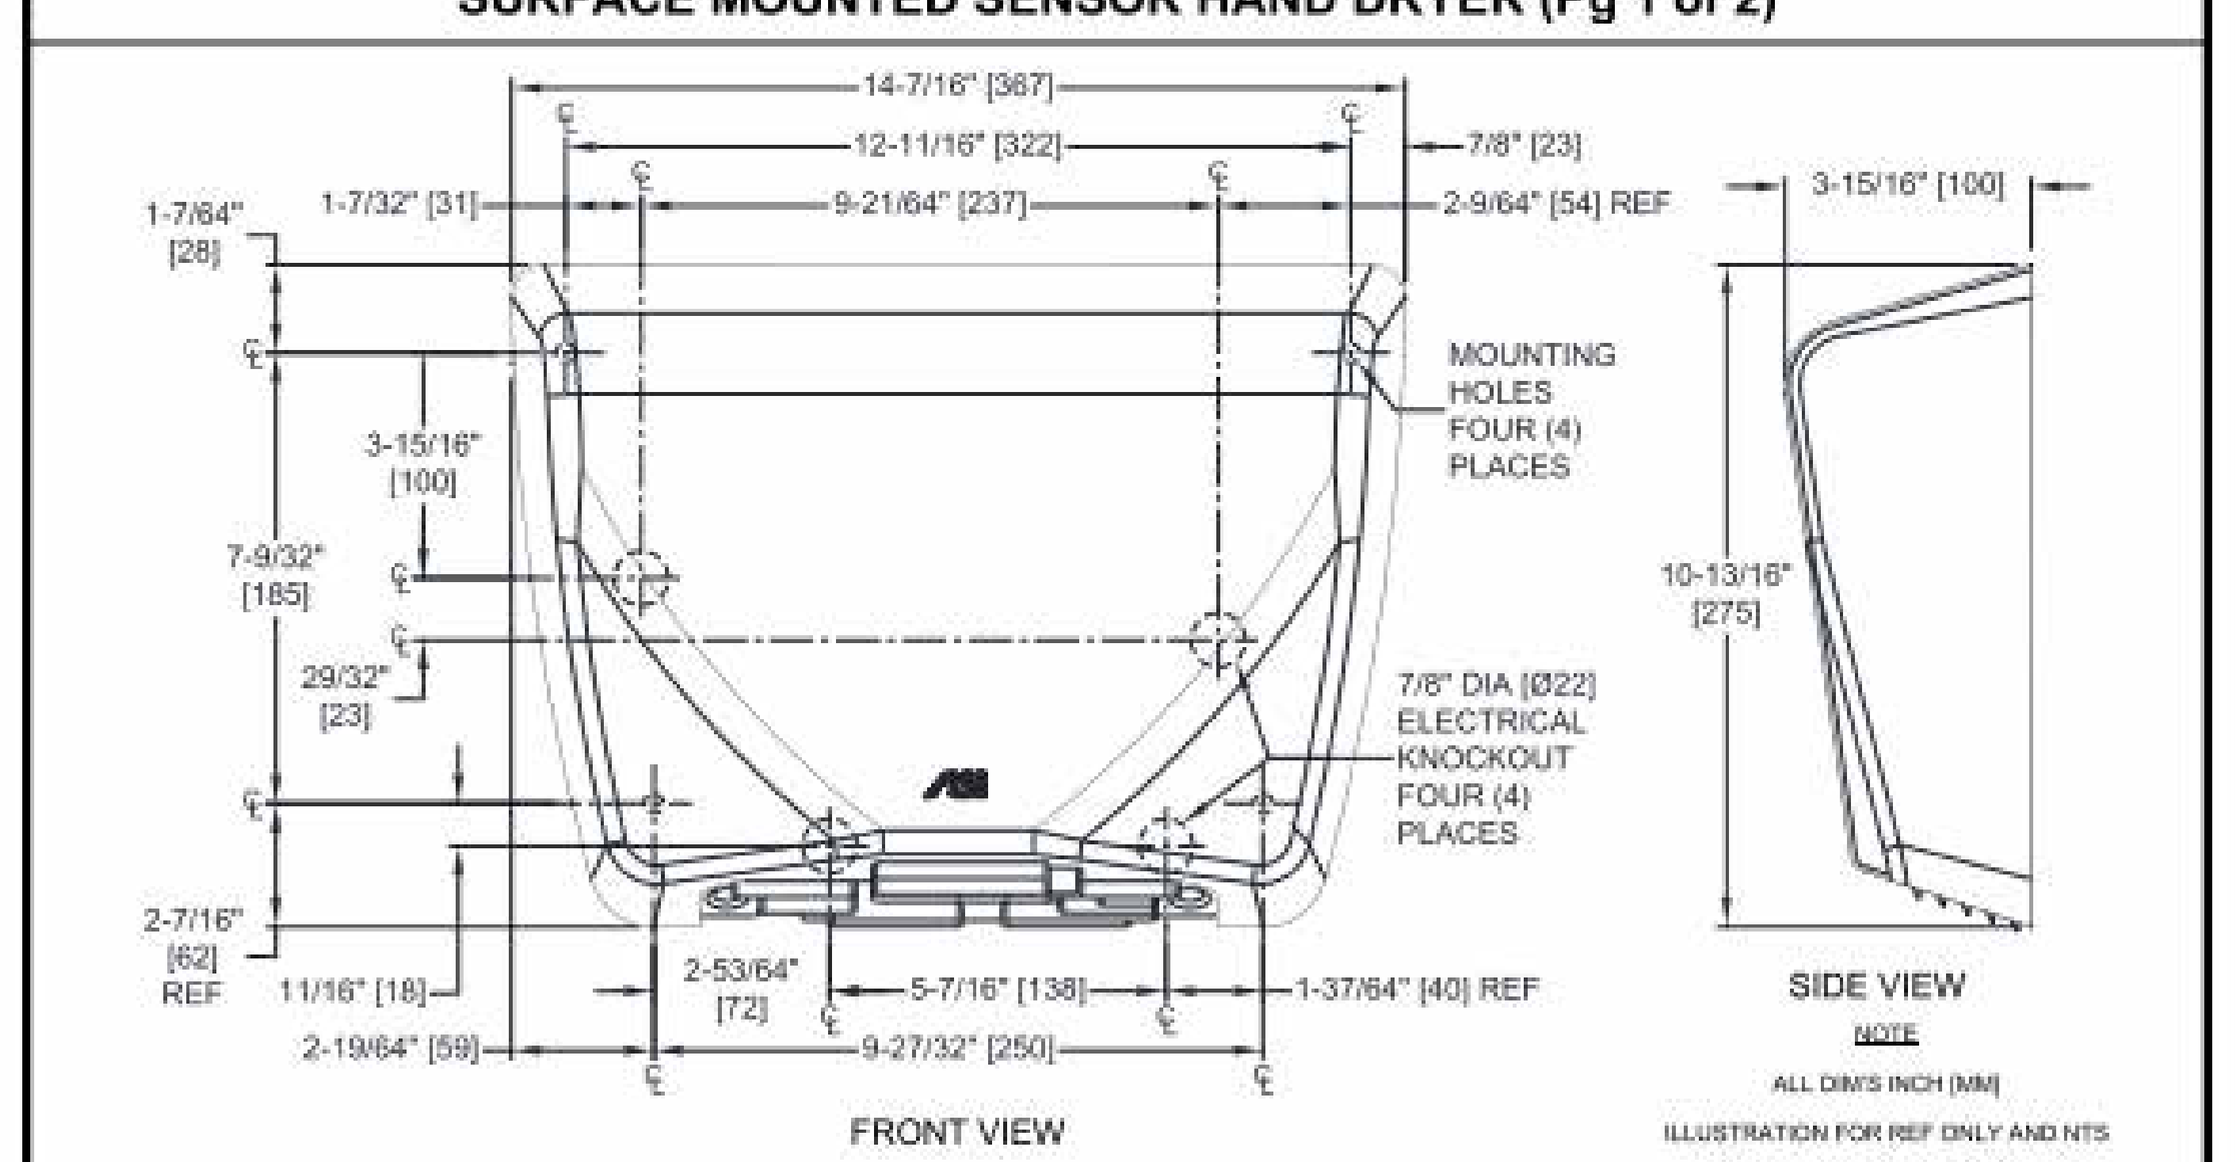

NOTE
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION
Surface Mounted Sensor Hand Dryer shall operate automatically from IR sensor that shall activate dryer when hands are placed in sensor zone. Motor and heating element shall have internal resetting automatic thermal protection. Cover shall be fabricated of one-piece, 16 gauge (.063", [1.6]) thick drawn steel or type 304 stainless steel and shall have all exposed surfaces finished with acid, chip and scratch resistant porcelain enamel on steel or bright or satin finish on stainless steel. Fixed directional air vanes shall be heavy duty, rust proof and tamper resistant. Air intake slots shall not allow access to internal parts. Back plate shall be furnished with vibration isolating mounting bushings. Circuitry shall have self-adjusting time-out and fail-safe off protection controlled by a microprocessor that shall detect and reject false signals and shall automatically self calibrate to provide uniform sensitivity over its entire life span. Entire unit shall be internally electrically grounded. Dryer unit shall have approval and be listed under the re-examination services of Underwriters Laboratories, Inc. Unit shall be warranted against defects in materials or workmanship for Ten (10) years. Owner's Manual (OM) and Mounting Template are supplied with each unit.

Surface Mounted Sensor Hand Dryer shall be Model № 0185 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913

INSTALLATION
Surface mount unit on wall with four (4) 1/4" screws, washers and bushings (supplied) through rubber grommets (supplied) in a corrosion protected formed heavy steel back plate into suitable prepared mountings (by others) or other suitable mounting hardware (by others) to suit wall conditions. For masonry walls use expansion bolts or anchors for 1/4" (6) screws. Electric service of 100-240VAC 20A 50/60 Hz (provided by others) is brought to RWO at location for dryer indicated on diagram above and is hooked up (by others) in accordance with schematic and Owner's Manual provided with unit. Electrical service is supplied and connected (by others) prior to installing cover. Cover is secured to back plate with two (2) hex socket security screws (supplied). For compliance with ICC/ANSI A-117.1-2003 and ADA Accessibility Guidelines install unit with bottom of sensor lens 48" [1219] max AFF (Above Finished Floor) if clear floor forward reach or if clear floor side reach access is provided or 46" [1168] max AFF if side reach access over an obstruction (e.g. vanity) with reach depth greater than 10" [254] and less than 25" [635] is only provided or 44" [1118] max AFF if forward reach over an obstruction (e.g. commode) with reach depth greater than 20" [508] and less than 25" [635] is only provided. For general utility install unit so that sensor lens is 44" to 50" [1118 to 1270] AFF. For installation of two or more dryers, dryers should be no closer than 24" [610] on center. See OM and Template supplied with unit.

OPERATION
Dryer is activated by user placing hands under sensor. LED in sensor array shines blue light during operation to guide user to optimal hand placement for shorter drying time. Dryer automatically shuts off after time-out when user removes hands from sensor zone.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

RA-1

©SLI DESIGN, INC.
ARCHITECTURE PLANNING INTERIOR DESIGN
15810 PARK TEN PLACE, SUITE 300
HOUSTON, TEXAS 77084
713-465-4650
www.sligroup.com

© COPYRIGHT

Shell Federal CREDIT UNION
26620 FM 1093 Rd
Katy, TX 77494

Project Number : 8972

	DATE
ISSUED FOR CLIENT APPROVAL	1/26/26
ISSUED FOR BIDDING	4/13/2026
ISSUED FOR PERMIT	4/13/2026
ISSUED FOR CONSTRUCTION	

REVISIONS

MARK	DESCRIPTION	DATE
A	Addendum A	04/21/26

The information, ideas, designs, details, layouts, techniques, features, arrangements, plans, sequences, dimensions, allowances, tolerances, conceptions, specifications, intentions, technology or embodiments, as illustrated, arranged, displayed, noted, recorded, indicated, represented, disclosed, evidenced, detailed or otherwise reduced to tangible form hereon, either expressly, inherently or by implication, are the confidential and proprietary information of SLI Design, Inc., and shall not be used for any purpose other than the specific project or undertaking identified on the drawing title block or legend for which they are and have been prepared by SLI Design, Inc. Any other reproduction, disclosure or use of any portion of the confidential and proprietary information of SLI Design, Inc., shall be a breach of the obligation of confidence created by the acceptance of this drawing from SLI Design, Inc. for a specific project or Contract. Any copying, duplicating, reproducing, utilization, alteration, modification, revision or change to this drawing, is expressly prohibited unless done with the prior written consent or approval of SLI Design, Inc., and shall not be undertaken without receipt of such prior written approval. This drawing is loaned by SLI Design, Inc., for the limited purpose of complying with a specific Contract. The drawing remains the property of SLI Design, Inc., and shall be returned upon request or completion of the contract, unless specifically authorized by Contract, under which it was loaned.

PRINT DATE: 2026/4/21 10:01:00

REGISTERED ARCHITECT
THOMAS B. BAKER
14288
STATE OF TEXAS
4.13.26

DRAWING TITLE
RESTROOM ACCESSORIES

DRAWN BY	VM	SHEET NO.
CHECKED BY	VM	A-12.02
APPROVED BY	BH	

C:\Users\sli\Documents\Shell_Federal_Credit_Union_Central_Fulshear_R2026-3_tgongFWSAU.rvt