




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №:	0362
ISSUED:	FEB 2007
REVISED:	26 NOV 2021

SURFACE MOUNTED STAINLESS STEEL AUTOMATIC LIQUID SOAP AND GEL HAND SANITIZER DISPENSER



FRONT VIEW **SIDE VIEW** **REAR VIEW**

TOP VIEW

NOTE
ALL DIM'S INCH (MM)
ILLUSTRATION FOR REF ONLY AND NTS
SEE SOAP DISPENSER CARE & MAINTENANCE
DOCUMENT ONLINE FOR CLEANING

SPECIFICATION

Surface Mounted Stainless Steel Automatic Liquid Soap and Gel Hand Sanitizer Dispenser shall hold and dispense liquid soap or gel hand sanitizers having a pH in range 7 ± 1.5 and soaps or lotions only having viscosity in range 100-5k cP (mm²/s [mPa·s]) or gel sanitizers having viscosities in range 3.5k - 5k cP (mm²/s [mPa·s]) and a capacity of 27 oz [8 L] using the refillable soap tank provided or disposable 27 oz [800 ml] bag-in-a-box format. Dispenser body shall be fabricated of alloy 18-8 stainless steel, type 304 with black high-impact ABS plastic top door, bottom plate and concealed gray high-impact ABS plastic back plate comprising a swing-open body secured with a top mounted lock which is opened with special barrel security key provided. All exposed stainless steel surfaces shall be either satin finish or matte black (add suffix -41). Dispenser shall be powered by four (4) AA-size (1.5 V) batteries (not supplied) and shall operate automatically from IR sensor that shall activate soap dispensing when hands are placed in sensor zone. Adjustable sensor detection range shall be preset at 2-3/8" [60] ± 1-1/2" [38]. An indicator LED shall provide status notification of battery condition and user sensor detection. Unit shall dispense a volume of .03 fl oz to .037 fl oz (1 ml to 1.1 ml) of soap or gel during each activation. A tamper resistant soap level-viewing window shall be provided. An Owner's Manual and Installation Guide (OM & IG) shall be provided with unit in carton.

Surface Mounted Stainless Steel Automatic Liquid Soap and Gel Hand Sanitizer Dispenser shall be Model № 0362 (add -41 for matte black) of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

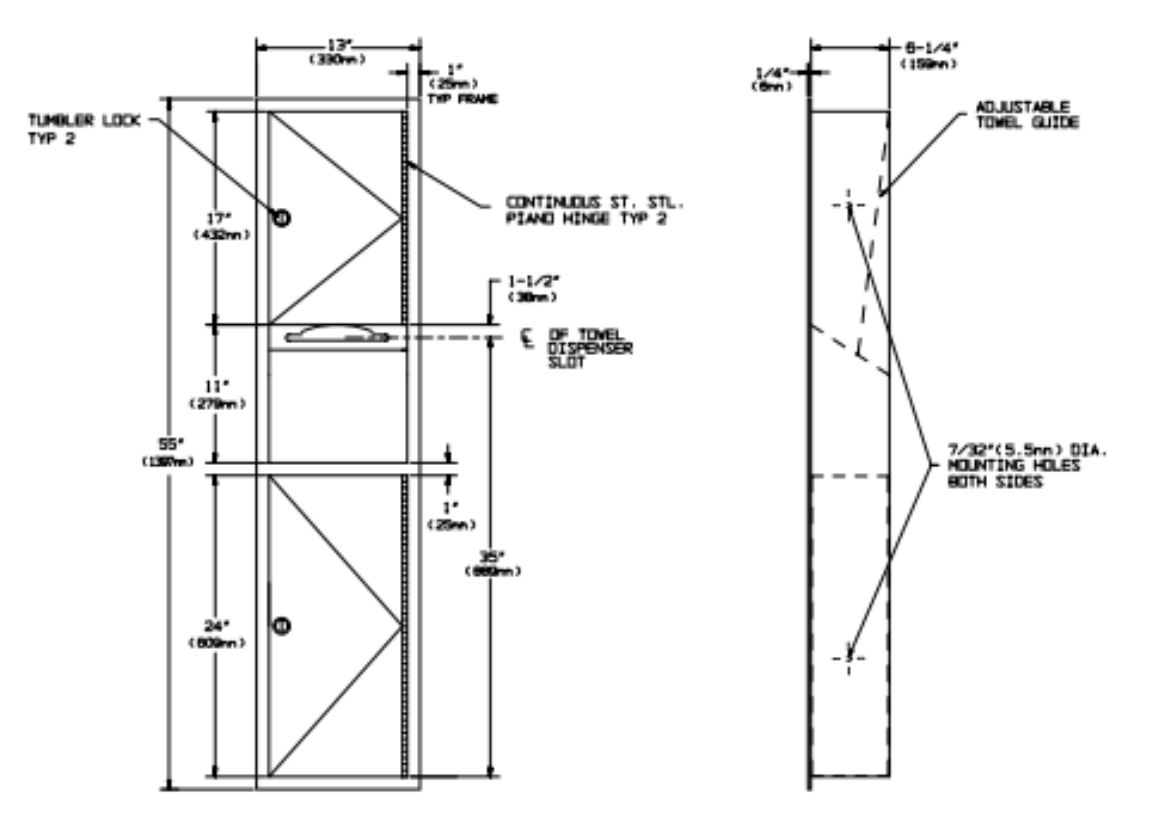
INSTALLATION

Surface mount unit to wall or partition with four (4) № 6 x 15/16" [M3.5 x 24] pan head self-threading pan head or flat head screws (supplied) into dry wall anchors (provided) through concealed mounting holes provided. Alternatively, unit may be installed on stand (Model № FS-0300) with hardware supplied with stand. Recommended installation height for general utility is 42" [1067] to 46" [1168] AFF to bottom of unit. For compliance with 2010 ADA Accessibility Standards install unit so that bottom of unit is no higher than 48" [1219] MAX AFF. Mount unit with bottom 7-7/8" [200] minimum above non-metallic washbasins or countertops and 11-13/16" [300] above stainless steel washbasins or countertops. OM & IG № 0610241228) and a MT (№ 0610160837) are provided with unit in carton.

OPERATION

Soap or gel sanitizer is automatically dispensed when hands are placed in sensor zone. Unit is reloaded by unlocking lock with special key (supplied), swinging open dispenser body and removing and refilling tank or replacing disposable internal container. Dispenser will continue to feed properly until empty. Supply is replenished manually on a cycle determined by maintenance needs. Batteries are replaced yearly or as required for heavy duty operation. See OM & IG for full details.

[illegible]

	AMERICAN SPECIALTIES, INC. 441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000	Model No: 0467 ISSUED: 1-87 REVISED: 9-04
RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE		
		
SPECIFICATION Recessed Paper Towel Dispenser and Waste Receptacle shall hold and dispense 600 C-fold, 800 multi-fold or 1100 single-fold paper towels and shall have a waste capacity of 7 gal (26 liters). Unit shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge with N-4 satin finish and be protected during shipment with a PVC film easily removable after installation. Adjustable guide shall be provided to allow dispensing of multi-fold or C-fold paper towels. Face trim shall be one piece construction with no miters or welding and shall be 1" (25.4mm) wide and have 1/4" (6.35mm) square return to wall. Cabinet shall have no exposed fastening devices or spot welded seams. Doors shall be double pan construction with No-Flx core and shall be mounted to cabinet body on 3/16" (4.8mm) dia. heavy duty stainless steel multi-staked piano hinges. Dispenser and disposal doors unit shall have tumbler locks keyed alike to other ASI washroom equipment.		
Recessed Paper Towel Dispenser and Waste Receptacle shall be Model N°0467 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913.		
INSTALLATION Unit is mounted in wall recess with N°10 self-tapping screws (by others) through concealed mounting holes. For compliance with "ADA" unit should be mounted with towel slot 54" (1372mm) max. above finish floor (AFF) for side reach or 48" (1219mm) max. AFF for frontal approach. Note that top of rough wall opening is 3/4" (19mm) below top of unit.		
Rough Wall Opening(RWO) required is 11-1/2" W x 53-1/2" H x 6-1/4" D. (292mm x 1359mm x 159mm)		
OPERATION Paper towels are manually withdrawn through dispensing slot. Dispenser is refilled by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished on cycle determined by maintenance needs.		
Accessory Specialties	AMERICAN DISPENSER	Desert Ray Products
THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT NOTICE		

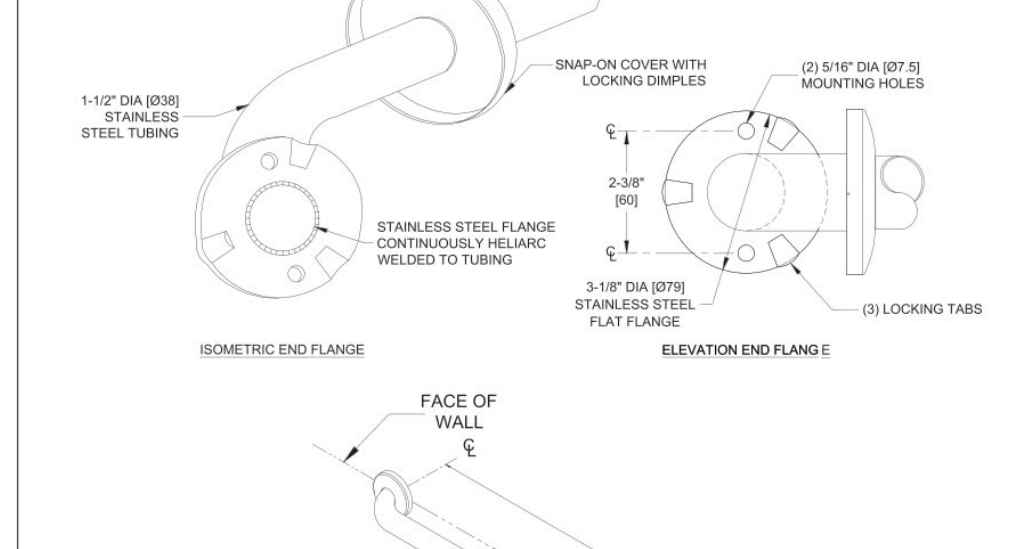
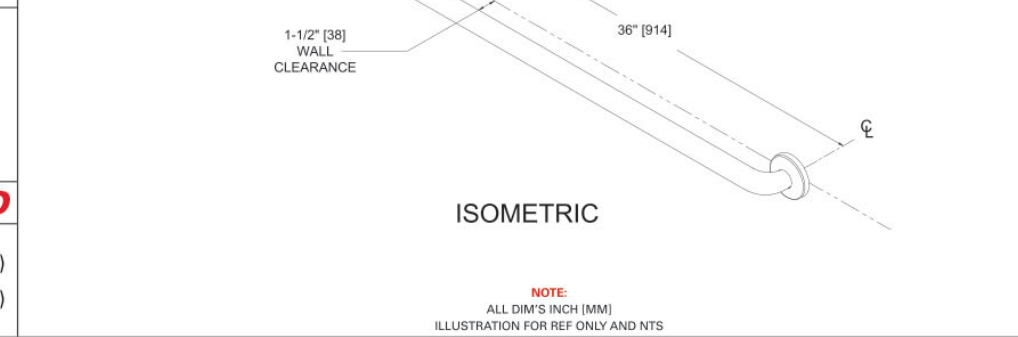
RA-5

Model #3801-36 Technical Data Sheet

1-1/2" Dia. Snap Flange Grab Bar - 36" [914] Length

Grab Bars

MasterFormat Section 10 28 13

	
Scan for Information   SUSTAINABILITY/LEED MR 4.1 (1) MR 6 (1) EQ 4.2 (1) MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)	 NOTE: ALL DIM'S IN CH (MM) ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Features include cover that snaps over mounting flange dimples to conceal screws and concealed mounting flange of 3-1/8" [79] O.D. with 2 screw holes and 3 locking dimples; 1/8" [3] thick, type 304 stainless steel. Cover is type 304 stainless steel with a satin finish and 22 gauge, 3-3/16" [81] diameter. 1-1/2" O.D. [38] exposed flange horizontal grab bar with a smooth surface.

Key Features & Specifications

- Straight Grab Bar
- Snap Flange - cover snaps over mounting flange to conceal screws
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 18 gauge tubing with 1-1/2" Outside Diameter [38]
- 36" [914] Length

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com
 Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023
 CSI: 10 28 13 Toilets Accessories Page: 1 of 2

RA-28.3

SPACE LEFT BLANK FOR STAMP

	AMERICAN SPECIALTIES, INC. 441 Saw Mill River Road, Yonkers, NY 10701 (914) 476.9000 • (914) 476.0688 www.americanspecialties.com	MODEL №: 0697-GAL ISSUED: 01-87 REVISED: 18 JUL 2019
	SURFACE MOUNTED SHELF AND DUAL TOILET PAPER HOLDER	

NOTE
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION
Surface Mounted Shelf & Dual Toilet Paper Holder shall hold two (2) 5" Dia [127] rolls of 1500 sheets or standard toilet paper rolls and shall have 5" [127] x 18" [457] shelf with 5/8" [16] hemmed lip on front edge. All metal parts shall be 18 gage [1.3] 304 stainless steel alloy 18-8. All exposed surfaces shall have satin finish and shall be protected during shipping by a PVC film easily removed after installation. Structural assembly of shelf and brackets/roll supports shall be of welded construction. Rollers (p/n R-003) shall be molded of high impact-resistant polystyrene plastic and two (2) shall be supplied.

Surface Mounted Shelf & Dual Toilet Paper Holder shall be Model № 0697-GAL as manufactured by American Specialties, 441 Saw Mill River Road, Inc., Yonkers, NY 10701-4913

INSTALLATION
Unit is surface mounted on wall or partition using №10 self-threading screws (by others) through holes provided in support brackets. For compliance with 2010 ADA accessibility Standards and 2015 ABA Standards, install unit so that centerline of nearest roll holder is 7" [178] min to 9" max [229] from front of toilet and axis of rolls is 15" [381] min AFF (Above Finished Floor) to 23" [584] max AFF. Recommended mounting height for general utility is 32" [813] to 36" [914] AFF.

OPERATION
Toilet paper rolls are self-feeding on user-pull demand until supply is depleted. Rollers are spring loaded for retention and provide free delivery.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

RA-1

[illegible]