




Enter address here

E/BE Project Number : 26129.00

[illegible]

The information, ideas, designs, details, layouts, techniques, features, arrangements, plans, sequences, dimensions, allowances, tolerances, conceptions, specifications, intentions, technology or embodiments, as illustrated, arranged, described or recorded on this drawing, and any other information disclosed hereon, otherwise reduced to tangible form hereon, either expressly, implicitly or by implication, are the confidential and proprietary information of SLL Design, Inc., and may not be used for any purpose other than the specific project or undertaking identified on this drawing. This drawing and the information disclosed hereon are prepared by SLL Design, Inc. Any other reproduction, disclosure or use of any portion of the confidential and proprietary information of SLL Design, Inc., shall be a breach of this Contract and shall constitute a violation of the Confidentiality Agreement from SLL Design, Inc. for a specific project or Contract. Any copying, duplicating, reproducing, utilization, alteration, modification, revision or change to this drawing, or any portion of the confidential and proprietary information of SLL Design, Inc. shall be a breach of this Contract and shall constitute a violation of SLL Design, Inc. This drawing is loaned but not be undertaken without receipt of such prior written approval. This drawing is loaned by SLL Design, Inc., for the limited purpose of complying with a specific Contract. The drawing remains the property of SLL Design, Inc. and shall be returned to SLL Design, Inc. upon completion of Contract, unless specifically authorized by Contract, under which it was loaned.

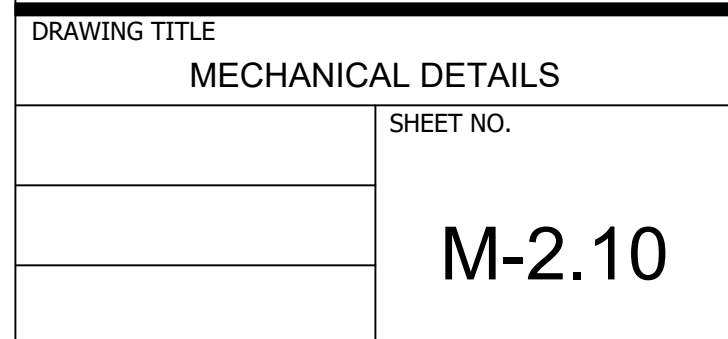

02



1. CEILING DIFFUSER SHALL BE INSTALLED SUCH THAT THE FACE OF DIFFUSER IS FLUSH WITH CEILING. REFER TO AIR DEVICE SCHEDULE FOR EXACT DEVICE.
2. SUPPORT FLEXIBLE DUCT FROM STRUCTURE. FLEXIBLE DUCT SHALL NOT KINK, SAG OR REST ON LIGHT FIXTURE, CEILING SUPPORT "TEES" OR CEILING TILE.
3. PROVIDE SQUARE TO ROUND TAP AT BRANCH DUCT WHERE FLEXIBLE DUCT SIZE EXCEEDS DIMENSION OF RECTANGULAR DUCT.
4. FOR UNCONDITIONED CEILING PLENUMS, INSULATE BACK OF CEILING DIFFUSER WITH 1" DUCT WRAP AND SEAL WITH VAPOR BARRIER TAPE.
5. METALLIC FLEXIBLE DUCT SHALL BE USED WHERE FLEXIBLE DUCT CONNECTIONS ARE SHOWN ON THE DRAWING TO ALL AIR DEVICES INSTALLED IN INACCESSIBLE LOCATIONS SUCH AS ABOVE GYPSUM BOARD OR PLASTER CEILINGS. (REFER TO ARCH. DRAWINGS FOR CEILING TYPE.)
6. CEILING "TEE" OR DRYWALL TRIM PIECE BY OTHERS.

SCALE: NONE


04



1. LOCATE TRAPS SA AS TO BE ACCESSIBLE FOR CLEANING.
2. TO DETERMINE OFFSET, SUBTRACT SCHEDULED E.S.P. FROM T.S.P. THEN ADD 1".
3. ROUTE TO NEAREST SANITARY DRAIN.

SCALE: NONE

03



SCALE: NONE

05