WALL MATERIAL LEGEND

CODE	MFG	SERIES	COLOR	ITEM #	SIZE	NOTES
PA-1	SHERWIN WILLIAMS		ALABASTER	7008		ALL WALLS U.N.O
PA-2	SHERWIN WILLIAMS	PRO MAR 400 ZERO VOC	HIGH REFLECTIVE WHITE	7757		CEILLING
PA-3	SHERWIN WILLIAMS		HUNT CLUB	6468		BOARDROOM WALL
WT-1	TBD					
TR-1	SCHLUTER	DESIGNLINE	BRUSHED BRASS ANODIZED	DL625AMGB	1' WIDE	BOARDROOM STONE WALL TRANSITION
WC-1	MOMENTUM	FRACTURE	SANDSTONE	SG2998		
WC-2	SURFACING SOLUTIONS	SOLID WOOD TAMBOUR	MAPLE	T655	9' TALL	
WC-3	TBD					

PLASTIC LAMINATE MATERIAL LEGEND

CODE	MFG	SERIES	COLOR	ITEM #	SIZE	NOTES
PL-1	WILSONART	STANDARD LAMINATE	PALISADES OAK	7987-38		FINE VELVET FINISH
PL-2	WILSONART	STANDARD LAMINATE	HAMPTON WALNUT	7959K-78		FINEGRAIN FINISH
PL-3	WILSONART	STANDARD LAMINATE	GREY MESH	4877-38		ELEVATOR CAB

FLOORING MATERIAL SCHEDULE

CODE	MFG	SERIES	COLOR	ITEM#	SIZE	NOTES
FT-1	ANATOLIA	MAYFAIR	CALACATTA ORO	4500-0378-1	24X48	POLISHED FINISH
FT-2	DALTILE	FABRIQUE	BLANC LINEN	P685	12X24	MATTE FINISH, 5/16" THICKNESS
LVT-1	KARDEAN	ART SELECT	CALACATTA D'ORO	LM33	18X36	ELEVATOR FLOORING
CA-1	ANDERSON TUFTEX	CHIT CHAT	NIGHTINGALE	ZZ261-00572		BROADLOOM
CA-2	MOHAWK	PATHMAKERS, GENTLE GROUND	NECTAR	GT364-739	12X36	PLANK HALF LAP RUN
WF-1	NYDREE FLOORING	ENGINEERED ACRYLIC INFUSED WOOD	PERFECT BROWN		4" WIDTH	
FT-3	TBD					
GT-1	TEXRITE		HOUSTON GRAY	713	3/16" THICKNESS	GROUT FOR FT-1
GT-2	TEXRITE		TITANIUM	618	3/16" THICKNESS	GROUT FOR FT-2

B

WALL BASE SCHEDULE

CODE	MFG	SERIES	COLOR	ITEM#	SIZE	NOTES
TB-1	ANATOLIA	MAYFAIR	CALACATTA ORO	4500-0376-1	12X24	1-1/2" PLINTH, MITERED EDGE
TB-2	TBD					

SOLID SURFACE MATERIAL LEGEND

CODE	MFG	SERIES	COLOR	ITEM #	SIZE	NOTES
ST-1	CAMBRIA	LUXURY SERIES	WYNCREST		132" X 65.5" SLAB	SATIN FINISH, BACKSPLASH, ALL COUNTERS U.N.O

APPLIANCE SCHEDULE

CODE	TYPE	MFG	MODEL #	ITEM#	FINISH	ROOMS	QTY
MW-1	MICROWAVE	WHIRLPOOL	WMT50011KS	6448605	STAINLESS STEEL	BREAKROOM 130	2
DW-1	DISHWASHER	KITCHENAID	KDTS224SPS	6817040	STAINLESS STEEL	BREAKROOM 130, WET BAR 132	2
IM-1	ICE MACHINE	HOSHIZAKI	AM-50BAK	440-AM50BAJ	STAINLESS STEEL	BREAKROOM 130,WET BAR 132	2


WINDOW COVERING SCHEDULE

CODE	TYPE	MFG	SERIES	COLOR	ROOMS
RS-1	AUTOMATIC ROLLER SHADE	SWF CONTRACT	CROSSHATCH 3% OPENNESS	C8209 WHITE/EGGSHELL	BOARDROOM 110
RS-2	AUTOMATIC ROLLER SHADE	SWF CONTRACT	PARALLEL BLACKOUT	C9816 WHITE/LINEN	BOARDROOM 110


ROOM FINISH SCHEDULE

NO.	ROOM	FLOOR	BASE	WALL ►	WALL ▲	WALL ◄	WALL ▼	CEILING
100	LOBBY	FT-1/CA-2	TB-1	PA-1/WC-2	PA-1/WC-2	PA-1/WC-2	PA-1/WC-2	GYP CEILING WITH INSET
101	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
102	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
103	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
104	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
105	OFFICE	WF-1/CA-1	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
106	OFFICE	WF-1/CA-1	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
107	OFFICE	WF-1/CA-1	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
108	CORRIDOR	WF-1/CA-1	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
109	EXECUTIVE SEATING	CA-1	EXISTING	PA-1	PA-1	PA-1	PA-1	GYP CEILING WITH INSET
110	BOARDROOM	WF-1/CA-3	EXISTING	TOUCH UPS-EXISTING	PA-1/PA-3/ST-1	TOUCH UPS-EXISTING	TOUCH UPS-EXISTING	COFFERED CEILING WITH CROWN MOLDING
111	ELEVATOR	LVT-1	N/A	N/A	PL-2/PL-3	N/A	PL-2/PL-3	NEW LIGHTS
112	ELEVATOR	LVT-1	N/A	PL-2/PL-3	PL-2/PL-3	N/A	PL-2/PL-3	NEW LIGHTS
113	ELEVATOR	LVT-1	N/A	PL-2/PL-3	PL-2/PL-3	N/A	PL-2/PL-3	NEW LIGHTS
114	CORRIDOR	FT-1	TB-1	PA-1/WC-2	PA-1/WC-2	PA-1/WC-2	PA-1/WC-2	NEW LIGHTS
115	WOMENS RR	FT-2	TB-2	WC-3	WC-3	WC-3	WC-3	NEW LIGHTS
116	MENS RR	FT-2	TB-2	WC-3	WT-1	WT-1	WC-3	NEW LIGHTS
120	WORKROOM	EXISTING	EXISTING	WT-1	WT-1	PA-1	PA-1	NEW LIGHTS
128	EXECUTIVE AREA	EXISTING/CA-2	EXISTING	PA-1	PA-1	PA-1	PA-1	REPLACE INSETS WITH NEW ACT
130	BREAKROOM	FT-2	EXISTING	PA-1	WC-1	PA-1	PA-1	GYP CEILING WITH INSET
132	WET BAR	FT-2	EXISTING	PA-1	PA-1	WC-1	PA-1	GYP CEILING
133	STORAGE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
135	WORKROOM	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
136	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
137	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
138	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
139	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
142	WORKROOM	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
143	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
144	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
145	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
146	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
148	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
149	OFFICE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
150	SUITE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS
151	CONFERENCE	CA/2	EXISTING	PA-1	PA-1	PA-1	PA-1	NEW LIGHTS

A B

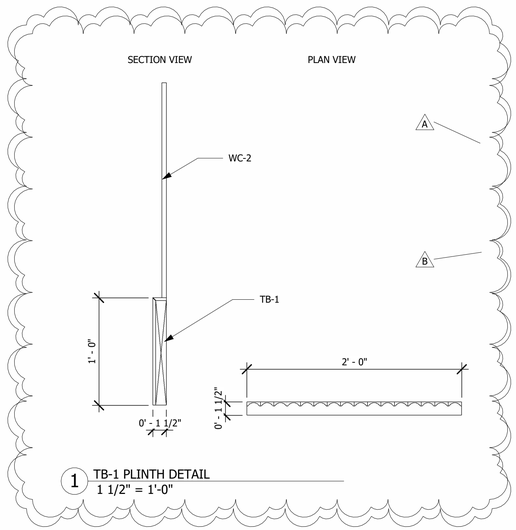

1 TB-1 PLINTH DETAIL
1 1/2" = 1'-0"



2 LINEAR LIGHT REVEAL DETAIL IN WC-2
1 1/2" = 1'-0"

GENERAL NOTES	
NO.	DESCRIPTION
1	SUBMIT A 12"X12" SAMPLE OF WALL FINISHES TO SLI FOR APPROVAL
2	PROVIDE SHOP DRAWINGS FOR ALL PLASTIC LAMINATE CASE GOODS
3	ALL CARPET/VCT TRANSITIONS TO BE FLUSH
4	RUBBER TRANSITION STRIPS TO BE INSTALLED ALL OTHER TRANSITIONS; CERAMIN TO VCT
5	RUBBER TRANSITION STRIPS TO BE INSTALLED ALL OTHER TRANSITIONS; RUBBER TILE TO GLUE DOWN CARPET
6	ALL GROUT LINES TO BE SEALED
7	ALL WALL COVERING MATERIAL SUPPLIED AND INSTALLED BY SLI
8	RENO TX SCHLUTER MATERIAL TRANSITIONA STRIP TO BE INSTALLED BETWEEN CERAMIC TILE AND GLUE-DOWN CARPET
9	ALL VCT TO BE SEALED WITH 3-5 COATS OF WAX, BUFF BETWEEN COATS
10	ANY REMAINING MATERIAL TO BE GIVEN TO CLIENT AS ATTIC STOCK
11	
12	

SLI DESIGN, INC.
ARCHITECTURE PLANNING INTERIOR DESIGN
15810 PARK TEN PLACE, SUITE 300
HOUSTON, TEXAS 77084
713-465-4650
www.sligroup.com

© COPYRIGHT

WOODFOREST NATIONAL BANK TOWN CENTER II

1330 Lake Robbins Dr
The Woodlands, TX 77380

Project Number : 8998

ISSUED FOR CLIENT APPROVAL	DATE
ISSUED FOR BIDDING	10.26.26
ISSUED FOR PERMIT	
ISSUED FOR CONSTRUCTION	10.30.26

REVISIONS

MARK	DESCRIPTION	DATE
A	ADDENDUM A	10.28.26
B	ADDENDUM B	11.03.26

The information, ideas, designs, details, layouts, techniques, features, arrangements, plans, sequences, dimensions, allowances, tolerances, conceptions, specifications, intentions, technology or embodiments, as illustrated, arranged, displayed, noted, recorded, indicated, represented, disclosed, evidenced, detailed or otherwise reduced to tangible form hereon, either expressly, inherently or by implication, are the confidential and proprietary information of SLI Design, Inc., and shall not be used for any purpose other than the specific project or undertaking identified on the drawing title block or legend for which they are and have been prepared by SLI Design, Inc. Any other reproduction, disclosure or use of any portion of the confidential and proprietary information of SLI Design, Inc., shall be a breach of the obligation of confidence created by the acceptance of this drawing from SLI Design, Inc. for a specific project or Contract. Any copying, duplicating, reproducing, utilization, alteration, modification, revision or change to this drawing, is expressly prohibited unless done with the prior written consent or approval of SLI Design, Inc., and shall not be undertaken without receipt of such prior written approval. This drawing is loaned by SLI Design, Inc., for the limited purpose of complying with a specific Contract. The drawing remains the property of SLI Design, Inc., and shall be returned upon request or completion of the contract, unless specifically authorized by Contract, under which it was loaned.

PRINT DATE: 11/3/2026 9:31:07 AM

REGISTERED ARCHITECT THOMAS B. HACKER 14288 STATE OF TEXAS
10.26.26

DRAWING TITLE
FINISHED FLOOR SCHEDULE

DRAWN BY	PL	SHEET NO.
CHECKED BY	BH	A-12.00
APPROVED BY	TB	

X:\Woodforest National Bank - Town Center II\Drawings\Woodforest- Town Center two.rvt